



DL Series

DL-04

Applications Indoor - Office, Clinic, Workshop, Corridor, Kitchen, Retail shop, Showroom, Toilet

Mounting	Recessed
THD	< 10
Power Factor	0.95
Housing	Die-cast aluminium
Reflector	Anodized Aluminum
Diffuser	Clear Glass
Internal Protection	IP 65
Impact Strength	IK 05
Weight	0.9 - 1.8 Kg
Efficacy	100 Lumens / Watt
Working Temp (ta)	50°C
Warranty	5 Years
Life Time	60,000 Hours
CRI	> 80


Certification SASO 2902
UL Listed
LM79, ISTMT, TM21
Photobiological




Other Options Emergency Backup - 3 Hr
Dimming 0-10V
Dali Interface
Gear Box



Photometric Data

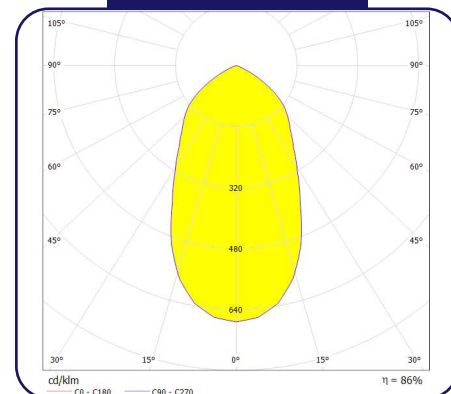

Drawing

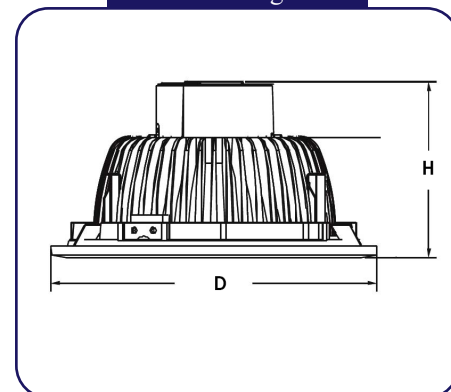

Model	Power	Size (D x H)	Lumen	Voltage	CCT	Beam Angle
NLC DL-04	15W	Φ145 x 60 mm	1500 LM	220-240V/50/60Hz	3000K	60°
	25W	Φ190 x 60 mm	2500 LM		4000K	
	35W	Φ230 x 72 mm	3500 LM	110-277V/ 50/60Hz	6000K	90°
	50W		5000LM			

Environment friendly product that is free of any hazardous materials

