





WP Series

L62

Photometric Data

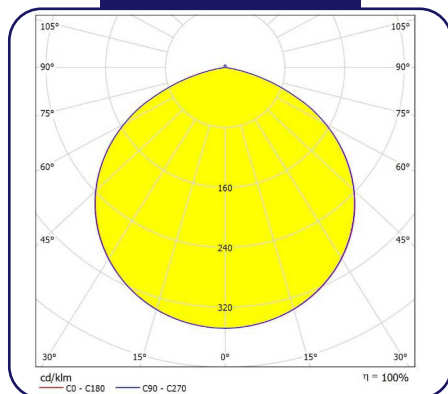

Drawing

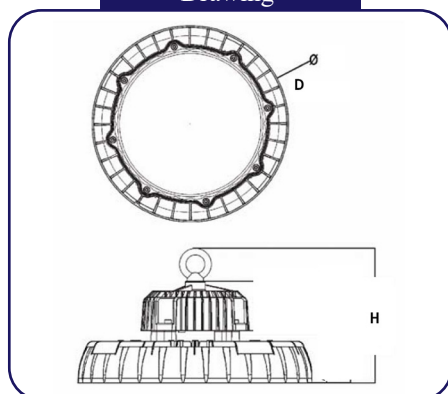

Applications

Indoor - Factories, Workshop, Warehouse, Tunnel, Electro-mech room, Hangers

Mounting

Pendant by chain

THD

< 10

Power Factor

0.98

Housing

Die-cast aluminum

Diffuser

Polycarbonate lens

Internal Protection

IP 65

Impact Strength

IK 08

Weight

2.9 - 6.2 Kg

Efficacy

140 Lumens / Watt

Working Temp (ta)

55°C

Warranty

Years

Life Time

72,000 Hours

CRI

> 80

Certification

SASO 2902

UL Listed

LM79, ISTMT, TM21

Photobiological



Other Options

Emergency Backup - 3 Hr

Dimming 0-10V

Dali Interface

Trunion bracket

Surface mounted

High efficacy - 170LM/W



| Model | Power | Size (D x H) | Lumen | Voltage | CCT | Beam Angle |
|------------|-------|--------------|----------|---------------------------------------|-------------------------|--------------------|
| NLC L62 | 60W | 250 x 140 mm | 8400 LM | 220-240V/50/60Hz 110-277V/ 50/60Hz | 3000K 4000K 5700K | 60° 90° 120° |
| | 100W | | 14000 LM | | | |
| | 150W | 320 x 140 mm | 21000 LM | | | |
| | 200W | 400 x 140 mm | 28000 LM | | | |
| | 240W | | 33600 LM | | | |

