




WP Series

L63


Applications	Indoor - Factories, Workshop, Warehouse, Tunnel, Electro-mech room, Hangers
Mounting	Pendant by chain
THD	< 10
Power Factor	0.98
Housing	Die-cast aluminum
Diffuser	Polycarbonate lens
Internal Protection	IP 66
Impact Strength	IK 10
Weight	2.9 - 6.2 Kg
Efficacy	140 Lumens / Watt
Working Temp (ta)	55°C
Warranty	5 Years
Life Time	60,000 Hours
CRI	> 80
Certification	SASO 2902 UL Listed LM79, ISTMT, TM21 Photobiological
Other Options	Emergency Backup - 3 Hr Dimming 0-10V Dali Interface Trunion bracket



Photometric Data

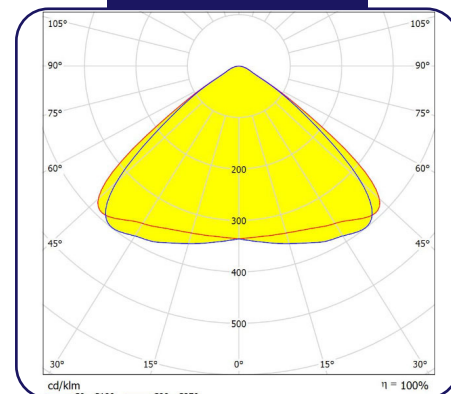

Drawing

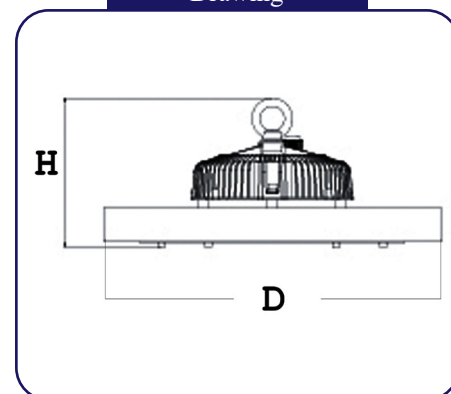

Model	Power	Size (D x H)	Lumen	Voltage	CCT	Beam Angle
NLC L63	100W	253 x 111mm	14000 LM	220-240V/50/60Hz 110-277V/ 50/60Hz	3000K	60°
	150W	308 x 117mm	21000 LM		4000K	90°
	200W	354 x 122mm	28000 LM		5700K	120°
	300W	405 x 130mm	42000 LM			

Environment friendly product that is free of any hazardous materials

