



SM Series

SM-06

Applications Indoor - Corridor, Kitchen, Retail shop, Stair case, Canopy, Diners

Mounting Surface

THD < 10

Power Factor 0.95

Housing Die Cast Aluminum

Diffuser Clear Glass

Internal Protection IP 20

Impact Strength IK 04

Weight 2.1 - 4.7 Kg

Efficacy 100 Lumens / Watt

Working Temp (ta) 50°C

Warranty 5 Years

Life Time 50,000 Hours

CRI > 80

Certification SASO 2902



UL Listed



LM79, ISTMT, TM21



Photobiological

Other Options Emergency Backup - 3 Hr




Dimming 0-10V




Dali Interface



Photometric Data

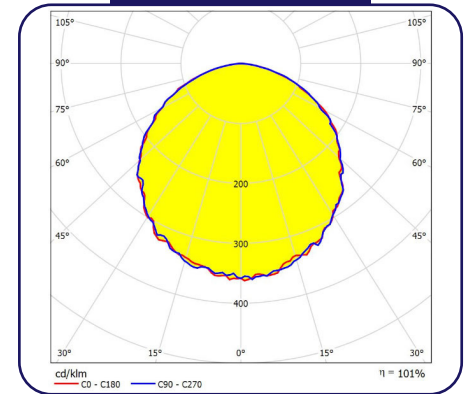

Drawing

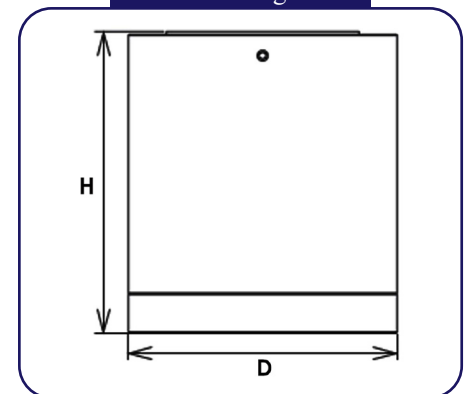

Model	Power	Size (D x H)	Lumen	Voltage	CCT	Beam Angle
NLC SM-06	9W	Ø90 x 90 mm	900 LM	220-240V/50/60Hz 110-277V/ 50/60Hz	3000K 4000K 6500K	60°
	15W	Ø130 x 160 mm	1500 LM			
	25W	Ø170 x 190 mm	2500 LM			
	35W	Ø200 x 200 mm	3500 LM			

Environment friendly product that is free of any hazardous materials

